INSTRUCCIONES PARA LA INSTALACION

Nueva 06/24/2004

ADVERTENCIA! CORTE LA CORRIENTE DESDE EL FUSIBLE O EL INTERRUPTOR

ENSAMBLAJE DE LA LAMPARA (Fig. 1)

1. Desempaque cuidadosamente su nueva lampara y coloque todas las partes en una superfice despejada.Tenga cuidado de no perder las partes pequeñas que son necesarias para la instalacion.
2. Corte la corriente en el circuito principal y saque la lampara vieja incluyendo la barra transversal.
3. Coloque la Abrazadera Circular (B) y montelo a la Caja de Union usando los dos Tornillos (C). El lado marcado “GND” deben quedar hacia afuera.
4. Atornille los Techones (D) en los agujeros de la Abrazadera Circular (B), separados en la misma distancia que los agujeros de los agujeros del Plato en la parte Superior de Lampara.
5. Instale los Brazos (H) ala Cubierta (E) y el Anillo de Metal (J) y asegurelo con los Tornillos (G). Aga lo mismo con el resto de los Brazos.

CONECTANDO LOS ALAMBRES (Fig.2)

6. Mientras sostiene la Lampara Superior asi el Techp conecte el alambrado electrico como se muestra en la (Fig.2), use un conector de plastico para asegurar la conexion. Si su caja de union tiene un alambre de tierra (verde o de cobre), conectelo al alambre de tierra de la lampara. Si no tiene, entonces conecte el alambre de tierra de la lampara directamente a la barra transversal usando el tornillo verde incluido.Meta ordenamente las conexiones a la caja de union.

TERMINANDO LA INSTALACION (Fig.1)

7. Levante la Cubierta sobre los Techones (D) asegurando la Cubierta sobre el Techo usando las Tuercas Decorativas (F).
8. Instale los focos de acuerdo a las especificaciones. **NO EXCEDA MAS DE LOS VATIOS ESPECIFICADOS!!**
9. Ensamble la Boquilla (I) al Ensamble Inferior de la Lampara.
10. Delize la Pantalla de Vidrio (K) sobre la Boquilla (I) y asegurela con la Tuerca Decorativa (L) como muestra en la Fig. 1.

Su instalacion a terminado, conecte la corriente electrica y pruebe la lampara.

<u>Nota:</u> La Ilustracion en la (Fig. 1) de este manual es para el proposito de instalacion solamente. Puede variar con la lampara que usted compro.

Fig. 1

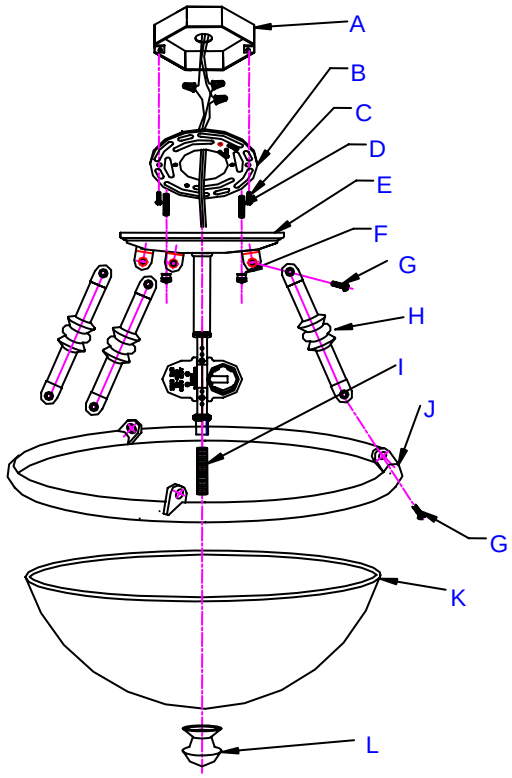

Fig. 2

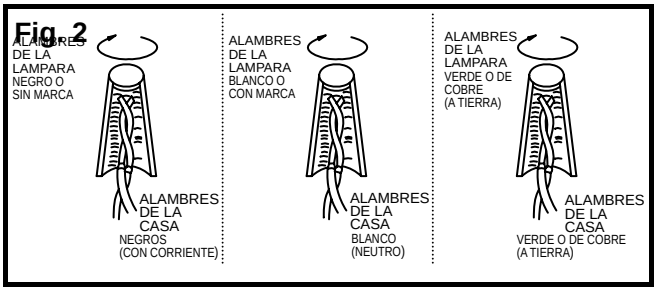
ALAMBRES DE LA LAMPARA NEGRO O SIN MARCA
ALAMBRES DE LA CASA NEGROS (CON CORRIENTE)
ALAMBRES DE LA LAMPARA BLANCO O CON MARCA
ALAMBRES DE LA CASA BLANCO (NEUTRO)
ALAMBRES DE LA LAMPARA VERDE O DE COBRE (A TIERRA)
ALAMBRES DE LA CASA VERDE O DE COBRE (A TIERRA)

En caso de preguntas sobre la instalacion o le faltaron partes, porfavor hablar al departamento de **Servicio al Cliente** al **1-800-527-0998** de Lunes a Viernes de 8:00 a.m. a 5:00 p.m. PST (Tiempo del Pacifico).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-827E/S

INSTALLATION INSTRUCTIONS

New 06/24/2004

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

1. Carefully unpack your new fixture and layout all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Shut off power at the circuit breaker and remove old fixture from ceiling, including the circular strap.
3. Attach the Circular Strap (B) to the Outlet Box using two Screws (C). The side of the Circular Strap marked “GND” must face out.
4. Thread two Studs (D) about into the pre-drilled holes in the Circular Strap (B) spaced the same distance apart as the holes in the top plate of Fixture Body.
5. Install Drop Rod (H) to Canopy (E) and Metal Ring (J) and secure with Screw (G). Do the same with other drop rod.

CONNECTING THE WIRES (Fig. 2)

6. While holding the Fixture Body towards the ceiling, connect the electrical wire as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the crossbar using the Green Screw provided. After wires are connected, tuck them carefully into the ceiling Junction Box..

FINISHING THE INSTALLATION (Fig.1)

7. Finish hanging the fixture by placing Fixture Body over both Studs (D) and secure Fixture Body against ceiling with Knurled Knobs (F).
8. Install the light bulbs in accordance with the fixture’s specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**
9. Thread Pipe (I) into the coupling on the bottom of Light Assembly
10. Place Glass Shade(K) upward over the Center Pipe (I) and secure with Finial (L) as shown in Fig. 1.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

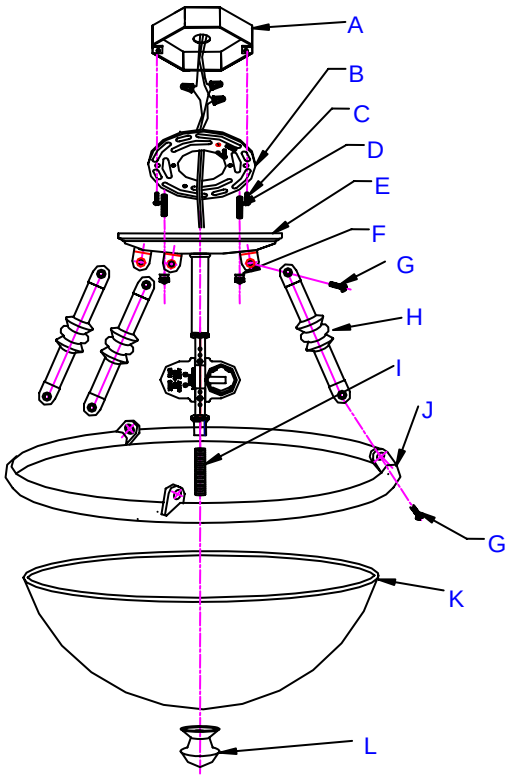

Fig. 2

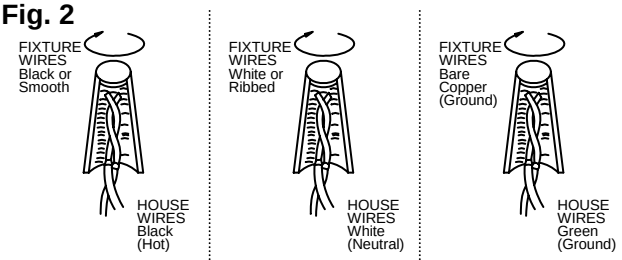
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green (Ground)

In the event that you should have any installation question or are missing parts, please contact **Customer Service**. Customer service may be reached weekdays a ***1-800-527-0998*** between the hours of 8:00am and 5:00pm PST (Pacific Standard Time).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-827E/S